


DIGILINK OptiPlus offers broad range of Fiber Couplers/Adaptors for different type of Connectors. These Couplers/Adaptors are available in both Single Mode and Multi Mode version also in choice of Simplex and Duplex type.

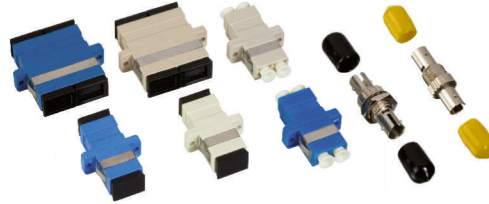

Product Features & Compliances

- Zirconia or Phosphor Bronze Sleeve
- Compliant as per EIA/TIA 568-B
- Compliant as per ISO/IES 11080
- UL Listed
- RoHS Compliant

Specifications

Mechanical & Optical

Insertion Loss: < 0.3 dB max
 Durability (1000 Matings): < 0.2 dB max
 Compatible Optical Fiber: 9/125 μm , 50/125 μm , 62.5/125 μm
 Material Ferrule: Phosphor Bronze (for MM), Zirconia (for SM)
 Operating Temperature: - 40°C to 80°C

Ordering Information

Description	Part Code
DIGILINK OptiPlus Multi Mode Connector	
Adaptor LC MM Simplex	DFADLCTYPXPM
Adaptor LC MM Duplex	DFADLCTYPDPM
Adaptor SC MM - PHBR Sleeve	DFADSCTYPXPM
Adaptor SC MM Duplex - PHBR Sleeve	DFADSCTYPDPM
Adaptor ST MM - PHBR Sleeve	DFADSTTYPXPM
DIGILINK OptiPlus Single Mode Connector	
Adaptor ST SM - ZR Sleeve	DFADSTTYPXZS
Adaptor FC SM - ZR Sleeve	DFADFCCTYPXZS
Adaptor SC SM - ZR Sleeve	DFADSCTYPXZS
Adaptor SC SM Duplex - ZR Sleeve	DFADSCTYPDZS
Adaptor LC SM - ZR Sleeve	DFADLCTYPXZS
Adaptor LC SM Duplex - ZR Sleeve	DFADLCTYPDZS