



# Outdoor / Indoor Unarmoured Loose Tube Cable



The DIGILINK OP2/OP3/OP∞ Loose Tube Dielectric cable is constructed with industry standard 2 mm gel-filled, buffer tubes, standard around a central strength member. There is tough-UV stabilized HDPE jacket over switch there is special anti termite Nylon-12 jacket suitable for Duct-pulling.

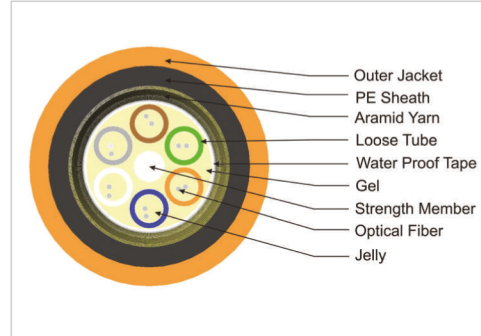

## Product Features & Compliances

- The OptiPlus Loose Tube is constructed with industry standard 2 mm gel-filled, buffer tubes, standard around a central strength member
- The buffer tubes are compatible with standard hardware, cable routing and fan-out kits
- The cable core is water blocked with materials, hydrophobic thixotropic jelly.
- Qualifies as per EIA/TIA 568B
- 0.6mm Thick orange coloured outer jacket of Nylon-12 material making in cable anti termite and best suited for duct-pulling with low frictional coefficient.

## Specifications

Operating Temperature: -30°C to +70°C  
 Storage Temperature: -40°C to 75°C  
 Crush Resistance: 44 N/mm  
 Tensile Strength: 2670N  
 Nominal Diameter: 12mm  
 Weight: 90kg/km

## Ordering Information

Description	Part Code	Part Code	Part Code	Part Code
DIGILINK OptiPlus Loose tube Type	<b>OP2</b>	<b>OP2</b>	<b>OP3</b>	<b>OP∞</b>
Anti Termite Nylon 12	<b>Multimode</b>	<b>Multimode</b>	<b>Multimode</b>	<b>Singlemode</b>
	<b>62.5 Micron</b>	<b>50 Micron OM2</b>	<b>50 Micron OM3</b>	<b>9 Micron</b>
4 Fibers	DFCA062GLN04	DFCA050GLN04	DFCA051GLN04	NA
6 Fibers	DFCA062GLN06	DFCA050GLN06	DFCA051GLN06	DFCA009GLN06
12 Fibers	DFCA062GLN12	DFCA050GLN12	DFCA051GLN12	DFCA009GLN12
24 Fibers	DFCA062GLN24	DFCA050GLN24	DFCA051GLN24	DFCA009GLN24